




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/38, H04B 7/26</b>		<b>A3</b>	(11) International Publication Number: <b>WO 98/31154</b>
			(43) International Publication Date: 16 July 1998 (16.07.98)
(21) International Application Number: PCT/FI98/00017 (22) International Filing Date: 8 January 1998 (08.01.98) (30) Priority Data: 970089                      9 January 1997 (09.01.97)                      FI (71) Applicant (for all designated States except US): NOKIA MOBILE PHONES LTD. [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): RANTA, Pekka [FI/FI]; Tiesmäenpolku 4, FIN-03100 Nummela (FI). RANTA, Jukka [FI/FI]; Ajokatu 1, FIN-24280 Salo (FI). (74) Agent: BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>  (88) Date of publication of the international search report: 17 September 1998 (17.09.98)	

(54) Title: A METHOD TO DETERMINE NEIGHBOUR CELL DATA IN A MOBILE CELLULAR SYSTEM AND A MOBILE STATION

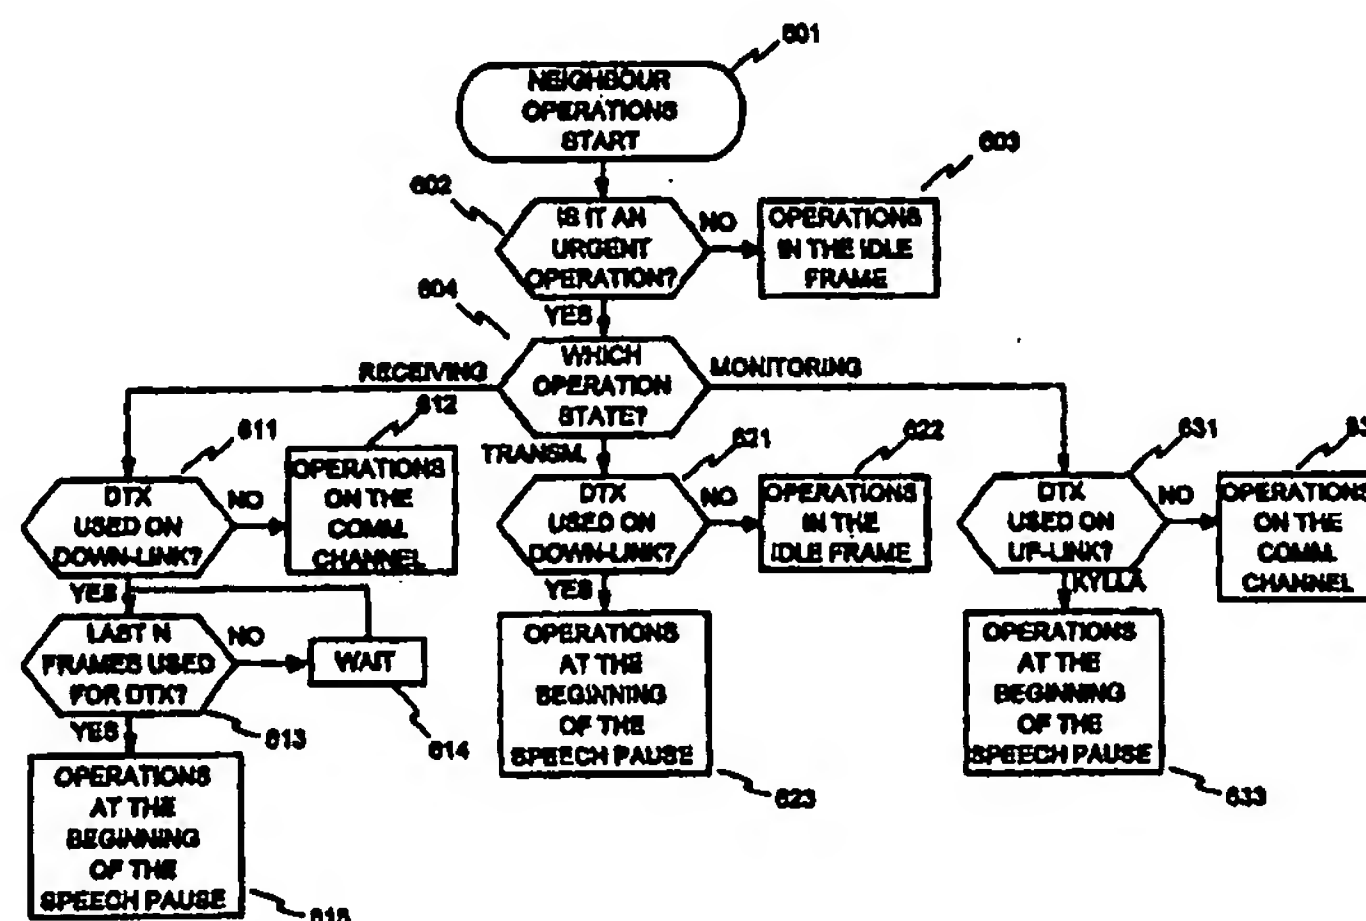

## (57) Abstract

The object of the invention is a method to determine channel information in a cellular system, in which method user information is transmitted in information frames, which are transmitted by the current cell base station, and in which method neighbour cell base station information (105, 205, 305, 405, 505, 603, 612, 615, 622, 623, 632, 633) is received in order to synchronise to the neighbour cell base station. Preferably, the method can be used to speed up or to enable the determination of channel information in connection with handover from the area of one base station to another. In the method, according to the invention, the user information transmission/reception is preferably interrupted during the reception (205, 305, 612, 632) of user information, which can be i.a. the signal level, the base station identity code (BSIC). In an urgent situation, during a rapid handover from one cell to another, said information can then be received at a sufficient rate, in other words also when an idle frame (102) cannot be obtained in a favourable way. The information is not received simultaneously with the transmission/reception of user information, so that only one receiver is required.

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00017

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/38, H04B 7/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04B, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5179559 A (KENNETH J. CRISLER ET AL), 12 January 1993 (12.01.93), column 1, line 57 - column 2, line 3; column 3, line 5 - line 57; column 5, line 30 - column 6, line 2 --	1,2,10,12
X	US 5383221 A (YOSHIHIRO AKITA ET AL), 17 January 1995 (17.01.95), column 3, line 8 - line 39, abstract --	1,5,10,12
A	GB 2294610 A (FUJITSU LIMITED), 1 May 1996 (01.05.96), page 3, line 33 - page 4, line 2; page 10, line 27 - page 11, line 32 --	1,8,9,12

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

13 July 1998

Date of mailing of the international search report

20-07-1998

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Peter Hedman

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00017

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5479409 A (BERNHARD DUPUY ET AL), 26 December 1995 (26.12.95), column 4, line 45 - column 5, line 24; column 5, line 34 - column 6, line 2  --	1,12
A	WO 9413113 A1 (NOKIA TELECOMMUNICATIONS OY), 9 June 1994 (09.06.94), page 3, line 17 - page 4, line 29  --	1,5,10,12
A	WO 9429981 A1 (TELEONAKTIEBOLAGET LM ERICSSON), 22 December 1994 (22.12.94), page 6, line 22 - page 7, line 7, abstract  -- -----	1,5,9,11,12

# INTERNATIONAL SEARCH REPORT

Information on patent family members

30/06/98

International application No.

PCT/FI 98/00017


Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5179559 A	12/01/93	NONE	
US 5383221 A	17/01/95	CA 2062039 A JP 4274627 A	02/09/92 30/09/92
GB 2294610 A	01/05/96	GB 2312133 A,B GB 9513853 D GB 9711841 D JP 8126047 A US 5740531 A	15/10/97 00/00/00 00/00/00 17/05/96 14/04/98
US 5479409 A	26/12/95	AT 166516 T AU 662241 B AU 4607393 A DE 69318667 D EP 0593320 A,B SE 0593320 T3 FI 934009 A FR 2695777 A,B NO 933267 A	15/06/98 24/08/95 24/03/94 00/00/00 20/04/94 16/03/94 18/03/94 16/03/94
WO 9413113 A1	09/06/94	AU 669038 B AU 5564094 A EP 0626122 A FI 95187 B,C FI 925448 A JP 7503593 T NO 942836 A US 5479410 A	23/05/96 22/06/94 30/11/94 15/09/95 31/05/94 13/04/95 29/09/94 26/12/95
WO 9429981 A1	22/12/94	AU 674241 B AU 7013094 A CA 2141446 A CN 1112384 A EP 0647380 A FI 950627 A JP 8500475 T NZ 267748 A US 5533014 A	12/12/96 03/01/95 22/12/94 22/11/95 12/04/95 13/02/95 16/01/96 26/11/96 02/07/96



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :  H04Q	A2	(11) International Publication Number: <b>WO 98/31154</b>  (43) International Publication Date: 16 July 1998 (16.07.98)
(21) International Application Number: PCT/FI98/00017 (22) International Filing Date: 8 January 1998 (08.01.98) (30) Priority Data: 970089 9 January 1997 (09.01.97) FI (71) Applicant (for all designated States except US): NOKIA MOBILE PHONES LTD. [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): RANTA, Pekka [FI/FI]; Tiesmäenpolku 4, FIN-03100 Nummela (FI). RANTA, Jukka [FI/FI]; Ajokatu 1, FIN-24280 Salo (FI). (74) Agent: BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  Published Without international search report and to be republished upon receipt of that report.

(54) Title: A METHOD TO DETERMINE NEIGHBOUR CELL DATA IN A MOBILE CELLULAR SYSTEM AND A MOBILE STATION

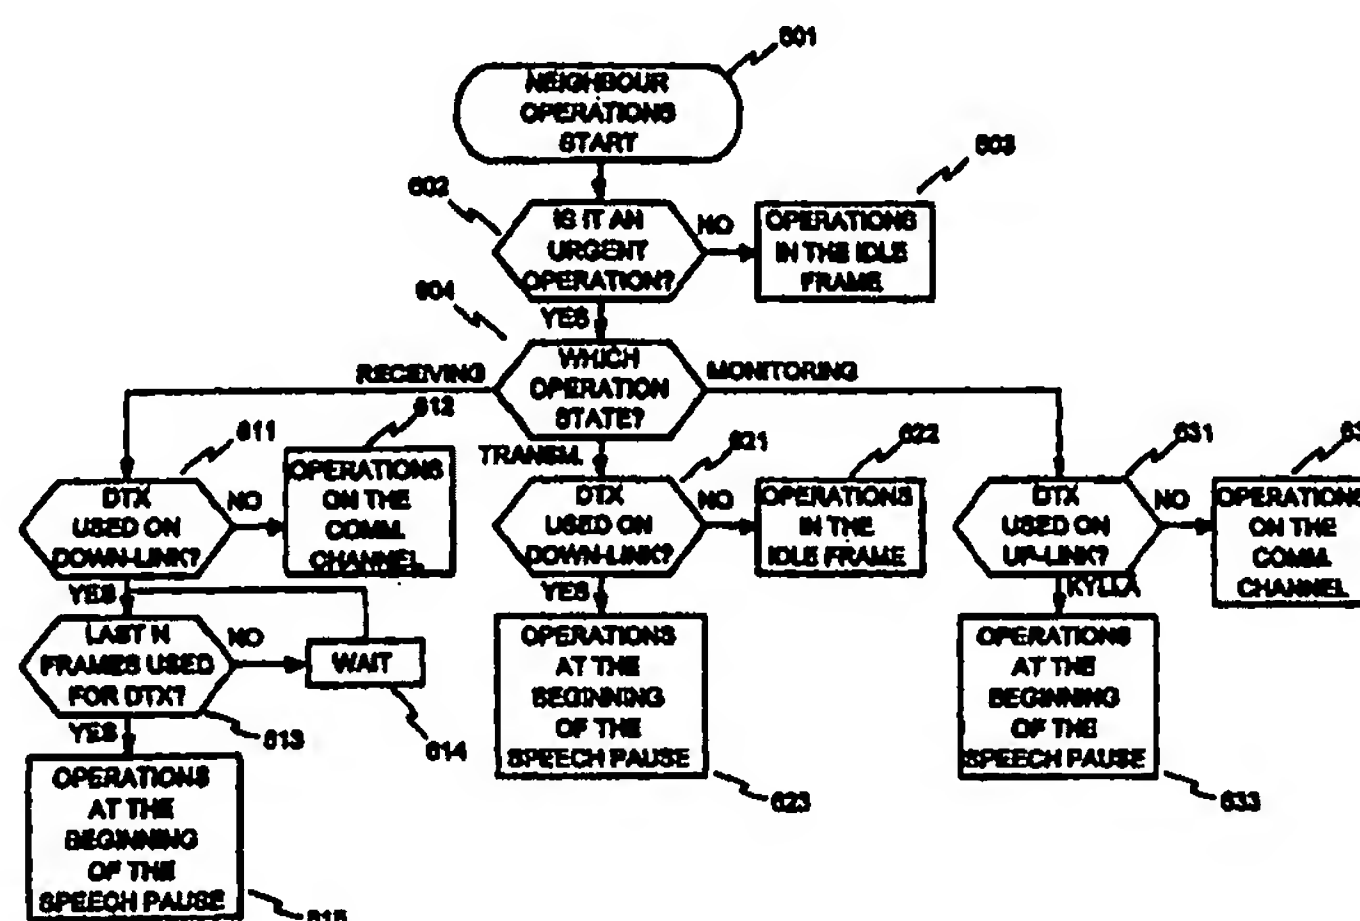

## (57) Abstract

The object of the invention is a method to determine channel information in a cellular system, in which method user information is transmitted in information frames, which are transmitted by the current cell base station, and in which method neighbour cell base station information (105, 205, 305, 405, 505, 603, 612, 615, 622, 623, 632, 633) is received in order to synchronise to the neighbour cell base station. Preferably, the method can be used to speed up or to enable the determination of channel information in connection with handover from the area of one base station to another. In the method, according to the invention, the user information transmission/reception is preferably interrupted during the reception (205, 305, 612, 632) of user information, which can be i.a. the signal level, the base station identity code (BSIC). In an urgent situation, during a rapid handover from one cell to another, said information can then be received at a sufficient rate, in other words also when an idle frame (102) cannot be obtained in a favourable way. The information is not received simultaneously with the transmission/reception of user information, so that only one receiver is required.



**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## **A method to determine neighbour cell data in a mobile cellular system and a mobile station**

The object of the invention is a method to determine the neighbour cell information in a cellular system where user information is carried in information frames transmitted by the base station of the current cell, and in which method information, for instance neighbour cell information, of the neighbour cell base station is  
5 received in order to synchronise to the base station of the neighbour cell or in order to perform level measurements. The method is preferably used to speed up or to enable determination of channel information during handover from one base station area to another.

It is important that a mobile cellular station can get information about the cells  
10 surrounding the cell corresponding to its current location, so that it can move to the next cell (MAHO, Mobile Assisted Handover). The information which must be determined in this context is i.a. the signal levels, signal strengths and the synchronisation information of the base stations of neighbour cells. For instance in the GSM system (Global System for Mobile communications) the synchronisation  
15 information is the frequency correction channel (FCCH) and the synchronisation channel (SCH) of the neighbour cell. The object is to acquire the information without causing interference in the user information during a call.

In continuous transmission systems (CDMA, Code Division Multiple Access; FDMA, Frequency Division Multiple Access) and in time division systems  
20 (TDMA, Time Division Multiple Access), when all time slots are used for the communication of information, a problem is the second receiver required for the determination. In a TDMA system, such as the GSM system, where one or more idle frames are reserved for the determination of neighbour cell information, the idle time is used for reception. There is a problem in that the idle time is barely  
25 sufficient for the reception. Due to this it is not always possible to obtain the FCCH and SCH information during the idle time. On the average, this information is obtained only after several unsuccessful reception during the idle frames, when the location in time of the FCCH and the SCH is unknown, or it is necessary to wait over several idle frames, even when the location of the FCCH and the SCH is  
30 known.

Prior art is illustrated with the aid of figure 1. There the frames 101, 103 and 104 are normal TDMA information frames of the GSM system. The frame 102 is an



idle frame, during which neighbour cell information is received 105 in a well known way. The time slots 0, 1, 2, ... 7 of the information frames are used in the following way: the time slot 0 transmits received information RX of the downlink transmission direction; the time slot 3 transmits the transmitted information TX of the uplink transmission direction, and neighbour cell signal level measurements are made during the time slots 5 and 6 at a monitoring moment M, which is not tied to the time slots. The other time slots are used i.a. for changing the synthesiser frequency. RX and TX are information signals, which can be speech or data information. The so called discontinuous transmission method (DTX) is not used during the period shown in the figure.

When the SCH time slot appears in the determination period 105 it is read during the idle frame 102. However, as mentioned above, this happens very seldom, and in this way the time slot is not usually found at the first attempt. Several systematically unsuccessful attempts are required in order to success, if the FCCH and SCH locations in time are unknown, or a delay over several idle frames is required, even when the FCCH and SCH locations are known.

The object of the invention is to create a solution for the determination of neighbour cell information, with which the above mentioned prior art problems can be avoided.

20 The characteristic features of the method according to the invention are presented in the characterizing part of claim 1. Preferred embodiments of the invention are presented in the characterizing parts of claims 2 to 7. The mobile station according to the invention is characterised by the features presented in the characterizing part of claim 11.

25 In the method according to the invention the reception/transmission of user information is preferably interrupted during reception of the neighbour cell information, which can be i.a. the signal level, the base station identity code (BSIC). Then said information can be received sufficiently often in an urgent situation, during a rapid handover from one cell to another, that is, also when no idle frame can be favourably received. The reception of neighbour cell information is not made simultaneously with reception/transmission of user information, and thus only one receiver is required. The invention makes it possible that in future systems the idle frame is not required at all. Also in delay nonsensitive packet reservation multiple access systems it is possible to delay the transmission during measurements.

The advantage of the method according to the invention is that the reception of neighbour cell information is made faster and more efficient when it uses time from the communication channel. Communication channel means the transmission path formed by the RX and TX time slots in the information frame. A channel encoding may reduce decreasing of the quality of the actual speech and data. The length of the interruption in reception is short compared to the interleaving time. The invention is preferable particularly in data services having long interleaving depths, for instance 19 bursts in GSM. Further the packet retransmission (automatic repeat request, ARQ) in GSM data services will correct the errors of the transmission path.

Thus it is usually possible to correct all transmission errors regarding data communication. The reception moment can be random or deterministic, so that the method utilises as much as possible the active periods of the discontinuous transmission, in other words those periods during which no active speech is transmitted during a call. When an active period of the discontinuous transmission has begun, it is possible to determine with a rather high reliability that the speech will not recommence at once, because the information reception time is rather short compared to human reactions. Said information can then be received when a period just has begun, and still one can be almost sure not to interfere with the speech. During about 50 % of the time the speech service will need no transmission.

The interval between repeated reception of neighbour cell information can be controlled on the basis of e.g. the signal quality, such as strength and correctness. When the signal quality is high there is a low probability of cell handover, and the reception can be reduced. When the signal quality is low there is a high probability of cell handover, and the reception of neighbour cell information is increased. Thus it is possible to minimise interruptions in the reception of the information signal.

A cell handover has a high probability i.a. when there is a long distance between the mobile station and the base station or when the attenuation on the radio path from the base station is high, when the signal strength from neighbour base stations starts to increase compared to the current base station, or when the mobile station moves at a high speed.

Preferably the reception of neighbour cell information can also be controlled so that information from different neighbour cells is received at different repetition rates. Further the neighbour cell information can be received at different repetition rates for different services and/or operating modes of the system.

The invention is preferably applied in connection with the discontinuous transmission (DTX) method of the GSM system. In this method transmission is

interrupted when the voice activity detection (VAD) does not detect any speech to be transmitted. Then a so called SID frame (Silence Descriptor) will be transmitted, which indicates the noise parameters describing the background noise. These SID frames are transmitted at a substantially lower rate than the frames for active speech. Thus there is substantially more free time between the SID frames for performing measurements than between the active speech frames. The GSM system is described in more detail e.g. in the book: [1] Michel Mouly & Marie-Bernadette Pautet: The GSM System for Mobile Communications, 1992, ISBN 2-9507190-0-7.

The method according to the invention is particularly well suited for the reception of neighbour cell information in the GSM system or in future systems, because the reception is quite short, but it must be made at a certain moment. In the present GSM system and with the prior art method it is often necessary to wait quite long i.a. for the synchronisation information transmitted on the SCH channel of the neighbour cell base station to slide over the position in time of the idle frame of the own base station. With the method according to the invention this information can be read also at other times than in the idle state. Thus the idle frames are not necessarily required. The position of the SCH is known in advance with an uncertainty of about 50  $\mu$ s, and it is a little shorter than the time slot having the length of 577  $\mu$ s. Thus this information can be received so that it causes the rejection of only one information carrying time slot.

A further advantage of the invention is that the need to use two receivers is avoided in continuous transmission systems and in a time division system, which utilises all time slots for information transmission.

The invention is described below with the aid of the enclosed drawings, in which:

figure 1 shows a prior art method to receive a neighbour cell SCH time slot during the idle frame;

figure 2 shows a way according to the invention to receive a neighbour cell SCH time slot, when the discontinuous transmission method is not in use;

figure 3 shows a way according to the invention to receive a neighbour cell SCH time slot, when the discontinuous transmission method is used in the up-link transmission direction;

figure 4 shows a way according to the invention to receive a neighbour cell SCH time slot, when the discontinuous transmission method is used in the down-link transmission direction;

figure 5 shows a way according to the invention to receive a neighbour cell SCH time slot, when the discontinuous transmission method used in the up-link transmission direction, and when monitoring replaces transmission;

5 figure 6 shows as a block diagram some alternative operations to determine neighbour cell information; and

figure 7 shows as a block diagram the parts of a GSM mobile station, which are essential in order to describe the invention.

Figure 1 was described above in connection with the prior art description.

10 The consecutive frames 201, 202, 203, 204 of figure 2 represent normal information frames. The operation is according to figure 2 when time is required in addition to the idle frame 102 (figure 1) in order to read neighbour cell information, for instance the SCH time slot. After the measurements M of the neighbour cell signal levels the selected base station is measured in frame 202 over the received time slot. This provides an extra determination time 205 in addition to the idle  
15 frame.

The practice shown in figure 3 utilises the discontinuous transmission method (DTX) of the GSM system in which transmission is interrupted when the VAD does not detect any active speech to be transmitted. Speech activity is measured from the signal energy. The object is to encode the speech at 13 kbit/s when the  
20 speaker is actively speaking, and otherwise at about 500 bit/s. The background noise is encoded at the slow rate. In the active state a frame of 260 bits is transmitted at intervals of 20 ms, otherwise a SID frame at intervals of 480 ms. Thus there is substantially more free time for measurements between the SID frames than between active speech frames.

25 The consecutive frames 301, 302, 303, 304 in figure 3 represent normal information frames. The discontinuous transmission method is activated in frame 302 in the up-link direction, and it stays activated in the following frames. During the activated period the TX time slot is not transmitted, and as the RX time slot is also left unreceived, the determination time 305 is increased and thus a period with the  
30 length of almost one frame is obtained for the reception of neighbour cell information, e.g. synchronisation information.

The consecutive frames 401, 402, 403, 404 in figure 4 represent normal information frames. The discontinuous transmission method is activated in frame 402 in the down-link transmission direction, and it stays activated in the following frames.



During the activated period no information is transmitted in the RX time slot, which is illustrated as an interval in the frames. The time slot of the received information is used to determine the neighbour cell information 405.

5 The consecutive frames 501, 502, 503, 504 in figure 5 represent normal information frames. The discontinuous transmission method is activated in frame 502 in the up-link transmission direction, and it stays activated in the following frames, the frames 502, 503 and 504. The measurement of the neighbour cell signal level is shifted to an earlier period, i.e. to the transmission time slot, and the obtained longer time 505 is used for the determination of neighbour cell information, for  
10 instance the synchronisation information.

Figure 6 presents as a block diagram the operation alternatives in order to perform neighbour operations. The neighbour operations are started in block 601. The first task is to examine in block 602 whether the operation is urgent, and if not, the operation is performed by prior art idle frames, block 603. In an urgent situation the  
15 block 604 can select one of three operational states: reception, transmission or monitoring.

During operation in the reception state block 611 examines whether DTX is used in the down-link transmission direction, and if not, the neighbour cell determination operations are performed by stealing reception time, block 612, as was illustrated in  
20 figure 2 by the segment of a line 205. When the discontinuous transmission method is used in the down-link transmission direction the block 613 examines whether the speech pause actually has begun, or have the last received N frames been DTX activated. If the frames have not been activated, then block 614 waits until they have been activated, whereby it is possible to perform neighbour cell determination  
25 operations instead of the missing received information, block 615, as was illustrated in figure 4.

During operation in the transmission state the block 621 examines whether DTX is used in the up-link transmission direction, and if not, the block performs neighbour cell information determination operations according to prior art, block 622, in the  
30 idle frame, frame 102 in figure 1; otherwise the determination operations are performed at the beginning of a speech pause using the transmission time slot, block 623.

During operation in the monitoring state the block 631 examines whether DTX is used in the up-link transmission direction, and if not, the neighbour cell information  
35 determination operations are performed by stealing reception time on the

communication channel, block 632, segment of line 205 in figure 2; otherwise the determination operations are performed at the beginning of a speech pause and the monitoring is shifted to the transmission time slot, block 633, segment of line 505 in figure 5.

5 Figure 7 shows as a block diagram i.a. the parts of a GSM mobile station, which are essential in order to describe the invention. The changes caused by the invention are primarily contained in the control unit 701, which controls the synthesiser oscillators 702 in order to change the reception frequency of the RF receiver 703. In  
10 a situation according to the invention, when neighbour cell information is received, the control unit 701 sets the reception frequency to the frequency of the neighbour cell at the moment it determined. The frequency of the neighbour cell's base station is typically obtained from a so called neighbour cell list, which the telephone receives. For instance in the GSM system the neighbour cell list is received on the broadcast control channel (BCCH). The invention utilises the information about the  
15 signal quality obtained from the decoder 707. The signal quality can be determined e.g. from the signal-to-noise ratio. This method is described e.g. in the publication [2] John G. Proakis: Digital communications (second edition), McGraw Hill Inc., New York. The signal quality information can be used to determine the measurement rate. If the signal quality is low, the measurements are made at a  
20 higher rate, because the handover probability increases.

Speech spoken to the microphone 709b is digitised on 13 bits at a sampling rate of 8 kHz, and the sample stream is encoded into parameters in the speech encoder 710. Speech encoding produces speech frames of 260 bits, and each frame corresponds to a speech sample with the length of 20 ms. They are further supplied to a channel  
25 encoder 711, which comprises a block encoder and a convolution encoder. The block encoder adds a bit pattern at the end of each speech frame, and the convolution encoder adds redundancy to the frame generated above, which lengthens the frame. Both operations are performed in order to facilitate error detection and correction at the reception. The length of the frame generated by the  
30 channel encoding is 456 bits.

The next step is to perform a two-phase interleaving 712. First the bit sequence of the frame generated above is processed by a certain algorithm, and the obtained new frame is divided into eight equal parts. These parts are further placed into eight successive frames of a time division TDMA (Time Division Multiple Access)  
35 system. The most important task of the interleaving is to spread out the transmission errors, which usually occur as bursts, evenly in eight frames. Thus successive bit errors occurring in the transmission of the TDMA frame causes



single bit errors in the frames generated by the channel encoding, and these single bit errors are corrected more easily.

The information is also encrypted so that unauthorised quarters can not listen in to the transmitted speech. The encrypted data is converted into an information burst in the block 713 by adding a training sequence, stop bits and time. A GMSK modulation (Gaussian Minimum Shift Keying) is performed in block 714, whereby the bits are transformed from a digital form into an analogue signal so that the bits are represented by different phases of a sinusoidal wave.

Finally the modulated burst is transmitted at radio frequency by the RF transmitter 715 on one of the centre frequencies of the 900 MHz frequency band, and to the antenna 717 via the Rx/Tx switch 716, which now is in the transmit position.

The receiving sections of a GSM mobile station operate in the reverse order compared to that presented above. This is shortly described in the following paragraph.

When information is received from the antenna 717 the Rx/Tx switch 716 is in a corresponding position and supplies the signal to the RF receiver 703, whose receive frequency is generated by the synthesiser oscillators 702. Then the signal is supplied to the A/D converter 704, which converts the analogue signal into a digital one. Then there is a detection demodulation 705, deinterleaving 706, channel decoding 707, whereby there is an attempt to correct any errors, and speech decoding 708. The decoded speech is supplied to the earpiece 709a.

The sections 702 to 708 and 710 to 715 are controlled by the control unit 701, in which the modifications according to the invention are made. The modifications required by the invention are primarily software modifications, which enable the operation according to the method.

A method according to the invention is described as a general example when a GSM mobile station moves from one cell to another. The mobile station receives information from the current cell, but also from the surrounding neighbour cells. Handover to a new cell is started, when the signal from a neighbour cell has a higher quality than the current cell, which is detected by the signal level measurement M.

The signal level, frequency information and synchronisation of the new cell, i.e. the cell into which the movement is made, are measured during the handover. The measurement is made primarily during the received idle frame 102 (figure 1). With

the aid of the discontinuous transmission method it can also be made 405 (figure 4) when there occurs a pause in the received speech, and the base station temporarily interrupts the transmission. If the neighbour cell information is not obtained during either of said periods, the information reception is temporarily interrupted when the  
5 base station of the current cell transmits, and the neighbour cell information, for instance the synchronisation information, is received during the interruption 205 (figure 2). Thus information is received more often than there are idle frames. At least the frequency correction channel (FCCH) and the synchronisation channel (SCH) are separated from the received signal. The receiver adjusts its operating  
10 frequency to the frequency of the new cell's base station and synchronises to it. This is a mobile station assisted handover from one base station to another, from one cell to another.

The interruption in the reception of information data due to the urgency of the determination is so short, one time slot, that it will not cause degradation of the  
15 speech or data quality, if the caused error can be corrected using an interleaving/error correction method (Forward Error Correction, FEC). The sample of the user information is encoded into sequential TDMA frames, so that one missing frame will not cause missing information in the reception, because the sample can be reconstructed from the previous and the next frames. If it is  
20 impossible to correct the error, this causes a quality degradation in the signal-to-noise ratio of only about 6 to 10 dB. The user can not hear this degradation, unless the user is expecting this event.

Particularly the invention can be utilised in a system with continuous transmission, such as the CDMA (IS-95), which typically uses only one frequency (re-use 1), but  
25 in which, however, there is a need for handover (interfrequency handover). Particularly in the CDMA system it is a great problem to realise this handover. One way to realise this handover is presented in the publication [3] IEEE Journal on selected areas in communications, vol. 12, No. 4, May 1994 "Design Study for a CDMA-Based Third-Generation Mobile Radio System". The present invention  
30 enables this monitoring of neighbour base station channel information in order to realise the handover.

The invention can also be used e.g. to localise a mobile station, whereby the localisation utilises channel information of the neighbour cell base stations.

A few applications and a way to realise the method according to the invention were  
35 presented above. Of course the invention is not limited to the presented examples, but the inventive idea can be modified within the scope of the claims, e.g. regarding

the detailed embodiment and the areas of use. Particularly it must be noted that although the examples presented above relate to the application of the invention in the GSM system, the invention can also be used in other digital TDMA, FDMA and CDMA cellular systems.

## Claims

1. A method to determine channel information in a cellular system, in which method user information is transmitted on a communication channel reserved for the connection between the current cell base station and the mobile station, and in  
5 which method there is received neighbour cell information (105, 205, 305, 405, 505, 603, 612, 615, 622, 632, 633) transmitted from the neighbour cell base station, **characterised** in that said transmission/reception of the user information is interrupted in the mobile station, and that neighbour cell information is received during said interruption at a moment which is reserved on the communication  
10 channel for the transmission/reception (205, 305, 612, 632) of user information.
2. A method according to claim 1, **characterised** in that the repetition interval of the moments for the reception of neighbour cell information is varied.
3. A method according to claim 2, **characterised** in that the handover probability is estimated, and that the repetition rate of neighbour cell reception moments is varied  
15 on the basis of the handover probability.
4. A method according to claim 1, 2 or 3, **characterised** in that neighbour cell information is received during randomly selected information frames of a time division system.
5. A method according to claim 1, 2 or 3, **characterised** in that neighbour cell  
20 information is received (105, 205, 305, 405, 505) during predetermined information frames of a time division system.
6. A method according to claim 5, **characterised** in that different information from neighbour cells are received at different reception rates.
7. A method according to any previous claim, **characterised** in that different  
25 services and/or operating modes have different neighbour cell information reception rates.
8. A method according to any previous claim, **characterised** in that said neighbour information is received (305, 405) during the pause (302, 303, 304, 402, 403, 404) in the user information transmission caused by the discontinuous transmission  
30 method.
9. A method according to claim 5, **characterised** in that the signal quality of a neighbour cell base station is monitored, and that when the discontinuous transmission method is active in the up-link transmission direction (502, 503, 505)

said monitoring is performed in place of the missing transmission and information is received between said monitoring and the next information reception (505).

10. A method according to any previous claim, **characterised** in that said cellular system is a GSM system.

5 11. A method according to any previous claim, **characterised** in that said cellular system is a CDMA system.

12. A mobile station connected to a cellular system, and comprising means (701 to 717) to transmit/receive user information on a communication channel between the current cell base station and said mobile station and means (701 to 707) to receive  
10 neighbour cell information from a neighbour cell base station, **characterised** in that it comprises means (701 to 703) to interrupt the transmission/reception of said user information and means (701 to 703) to receive neighbour cell information transmitted by a neighbour cell base station during said interruption at a moment, which is reserved on the communication channel for the transmission/reception of  
15 user information.

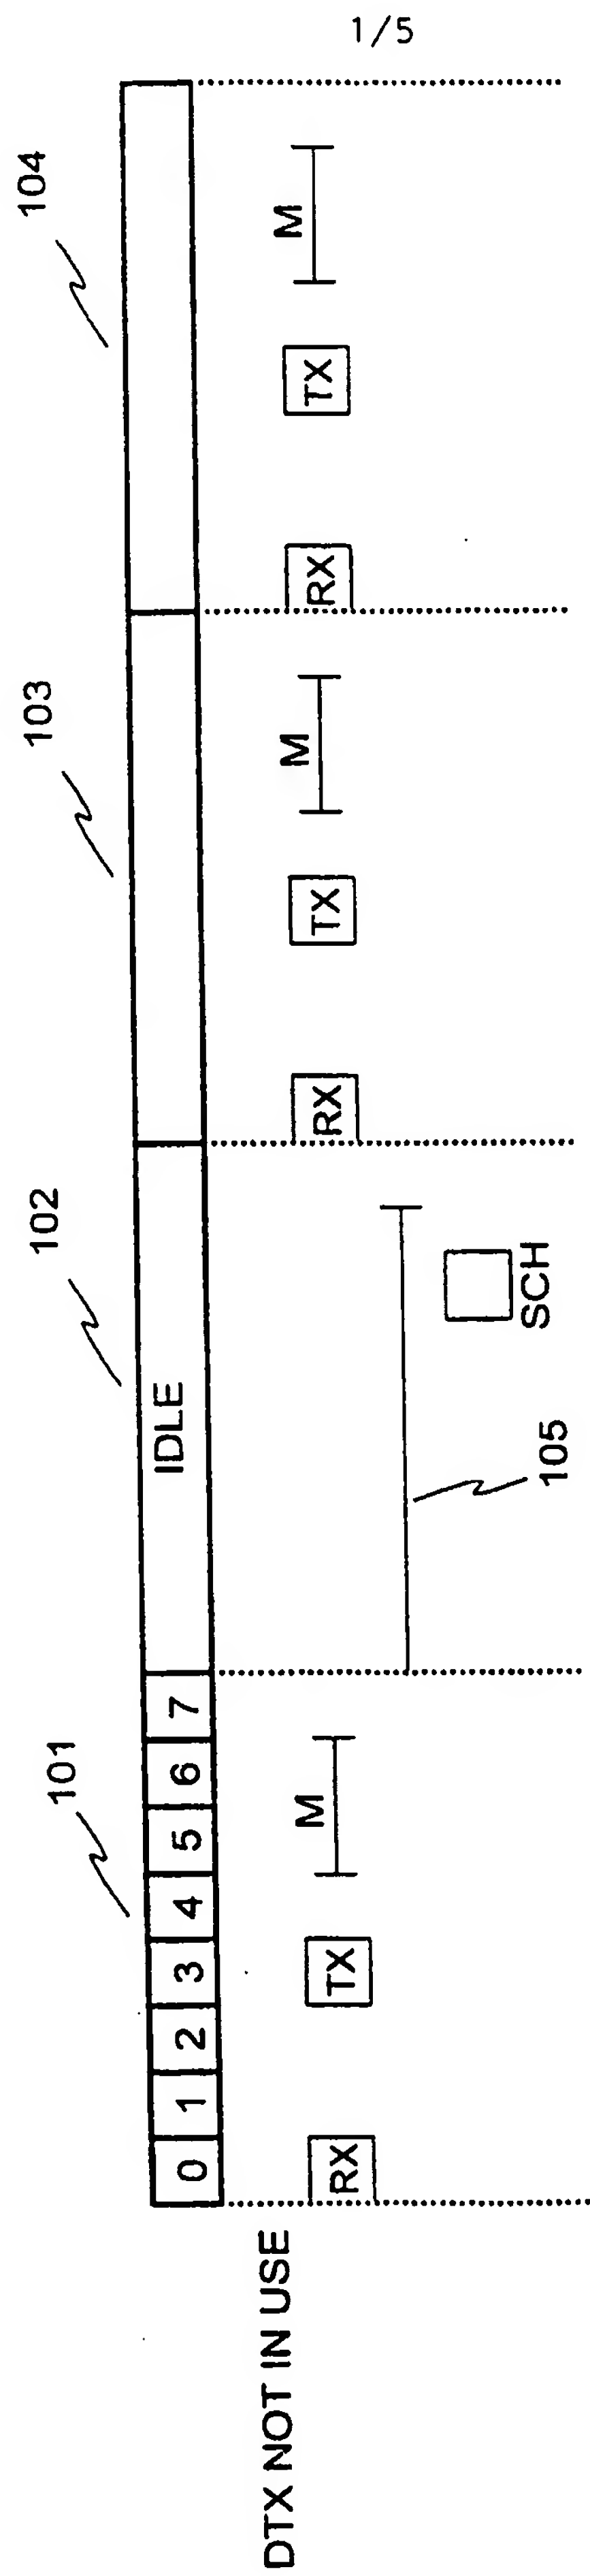


FIGURE 1



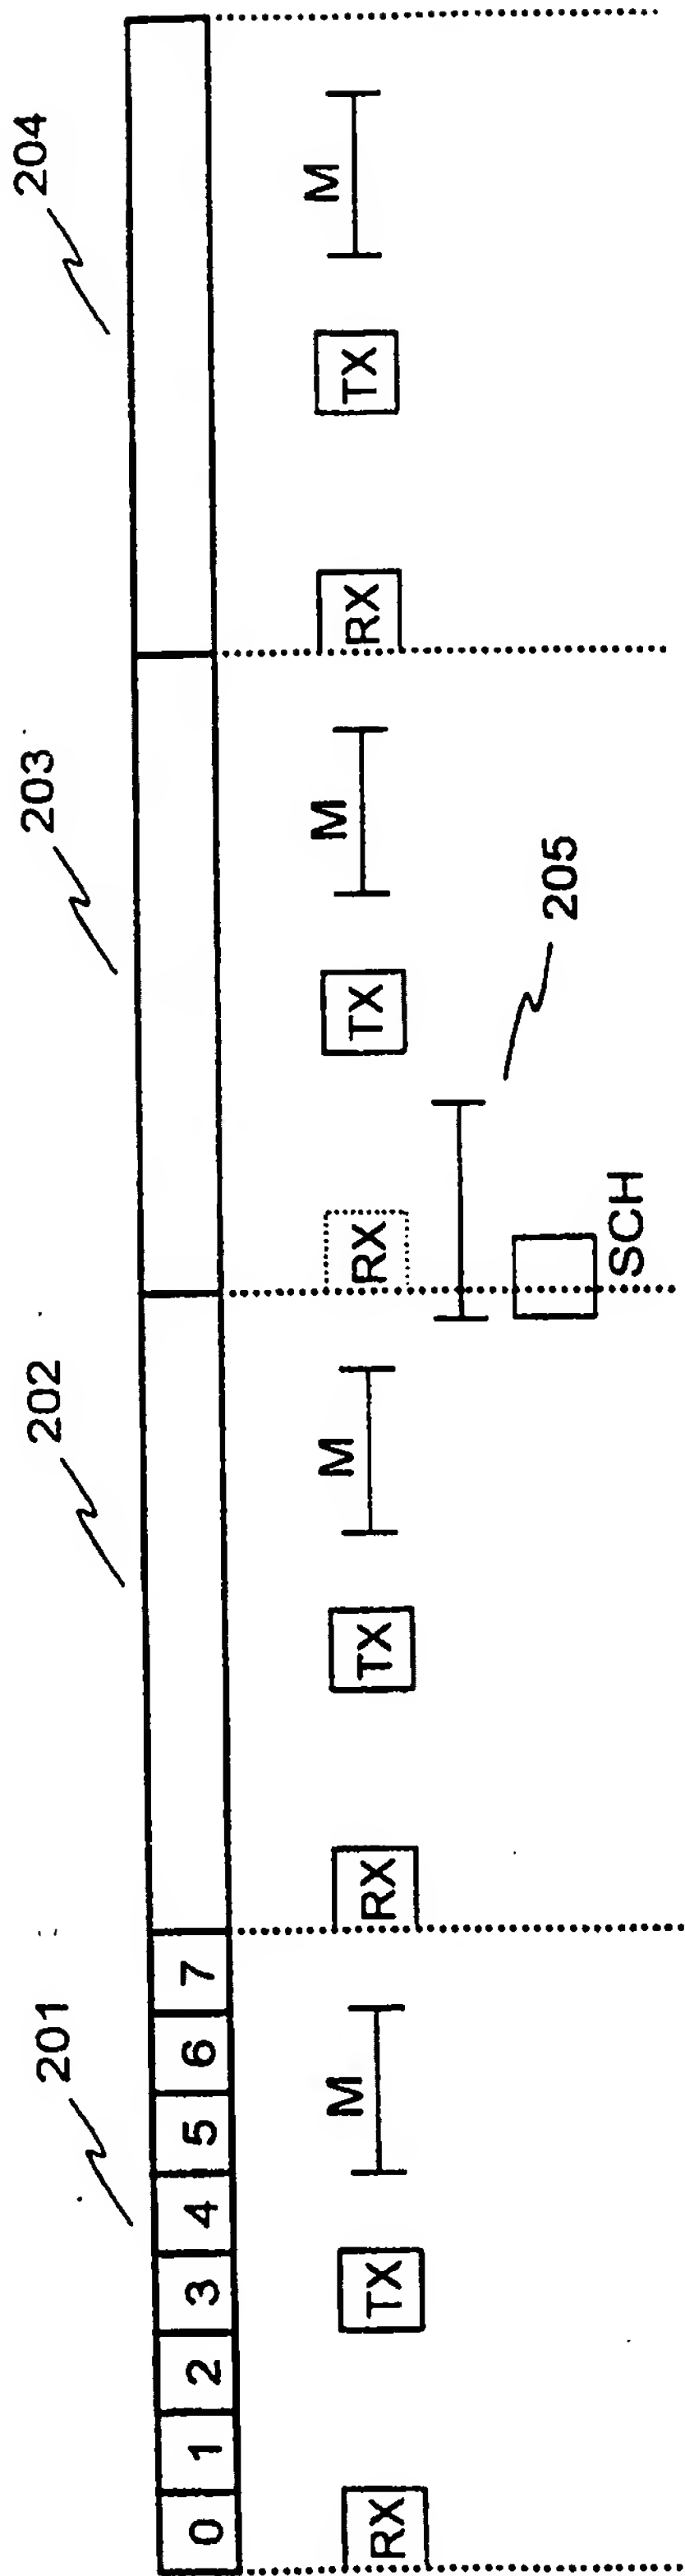


FIGURE 2

DTX NOT IN USE

2/5

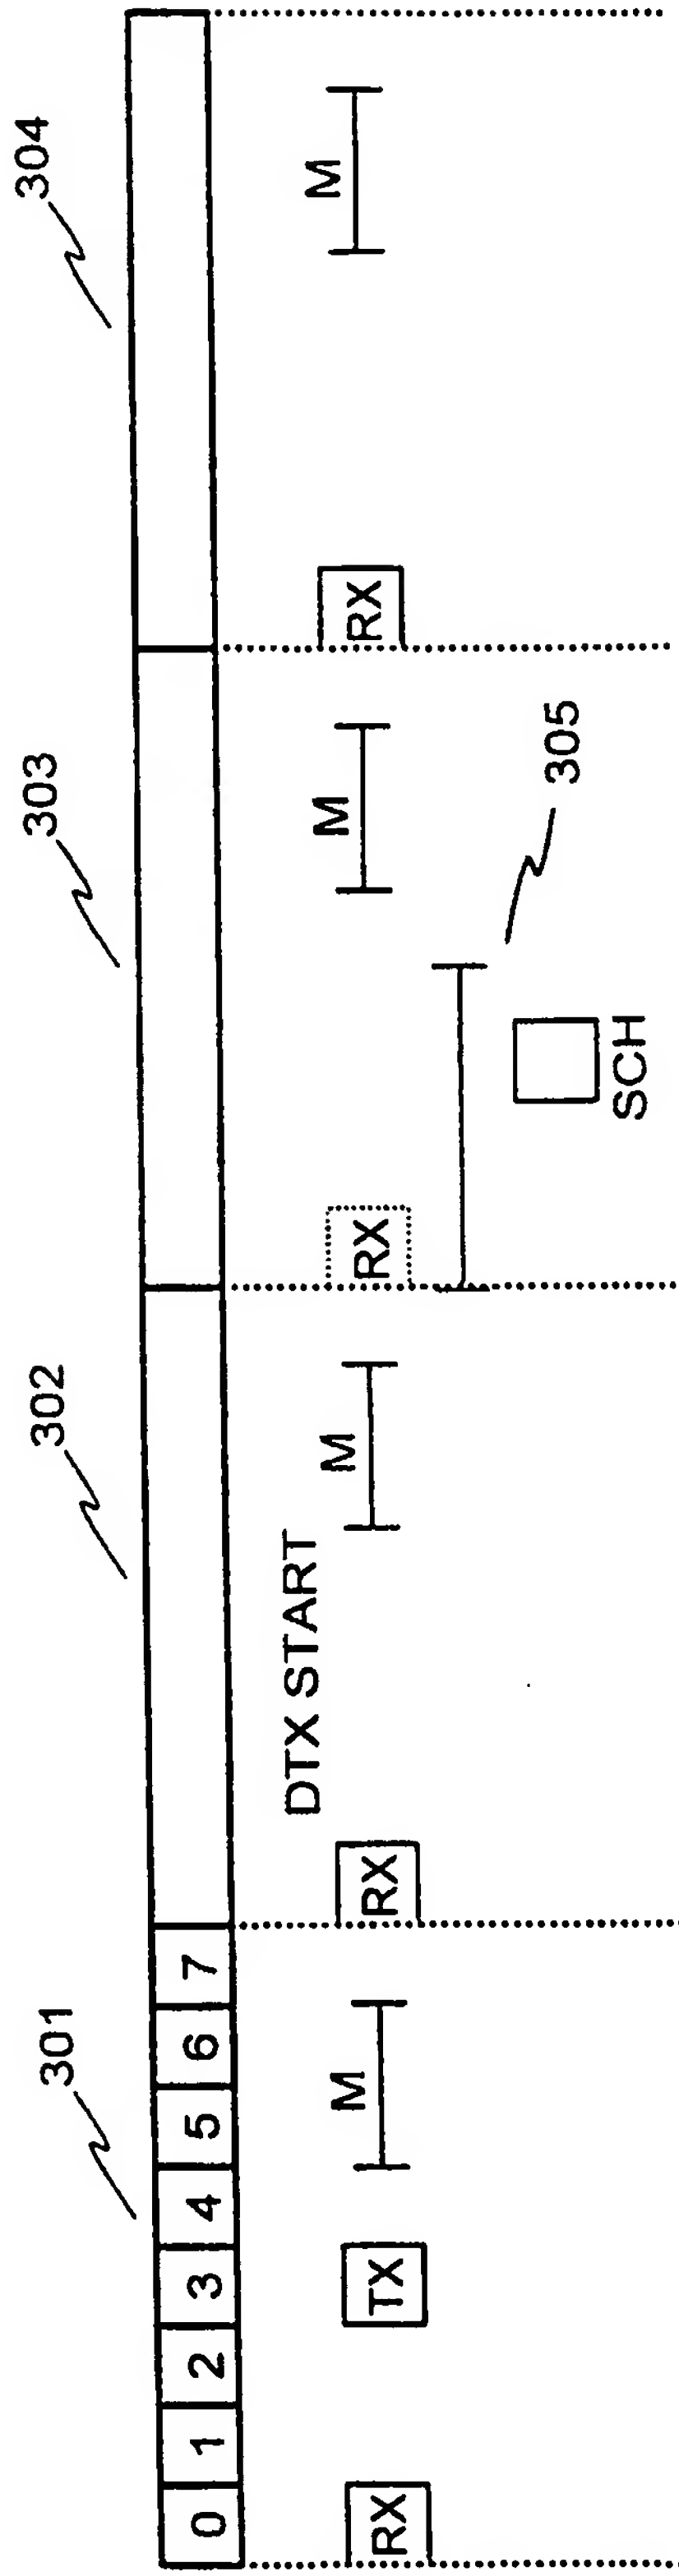
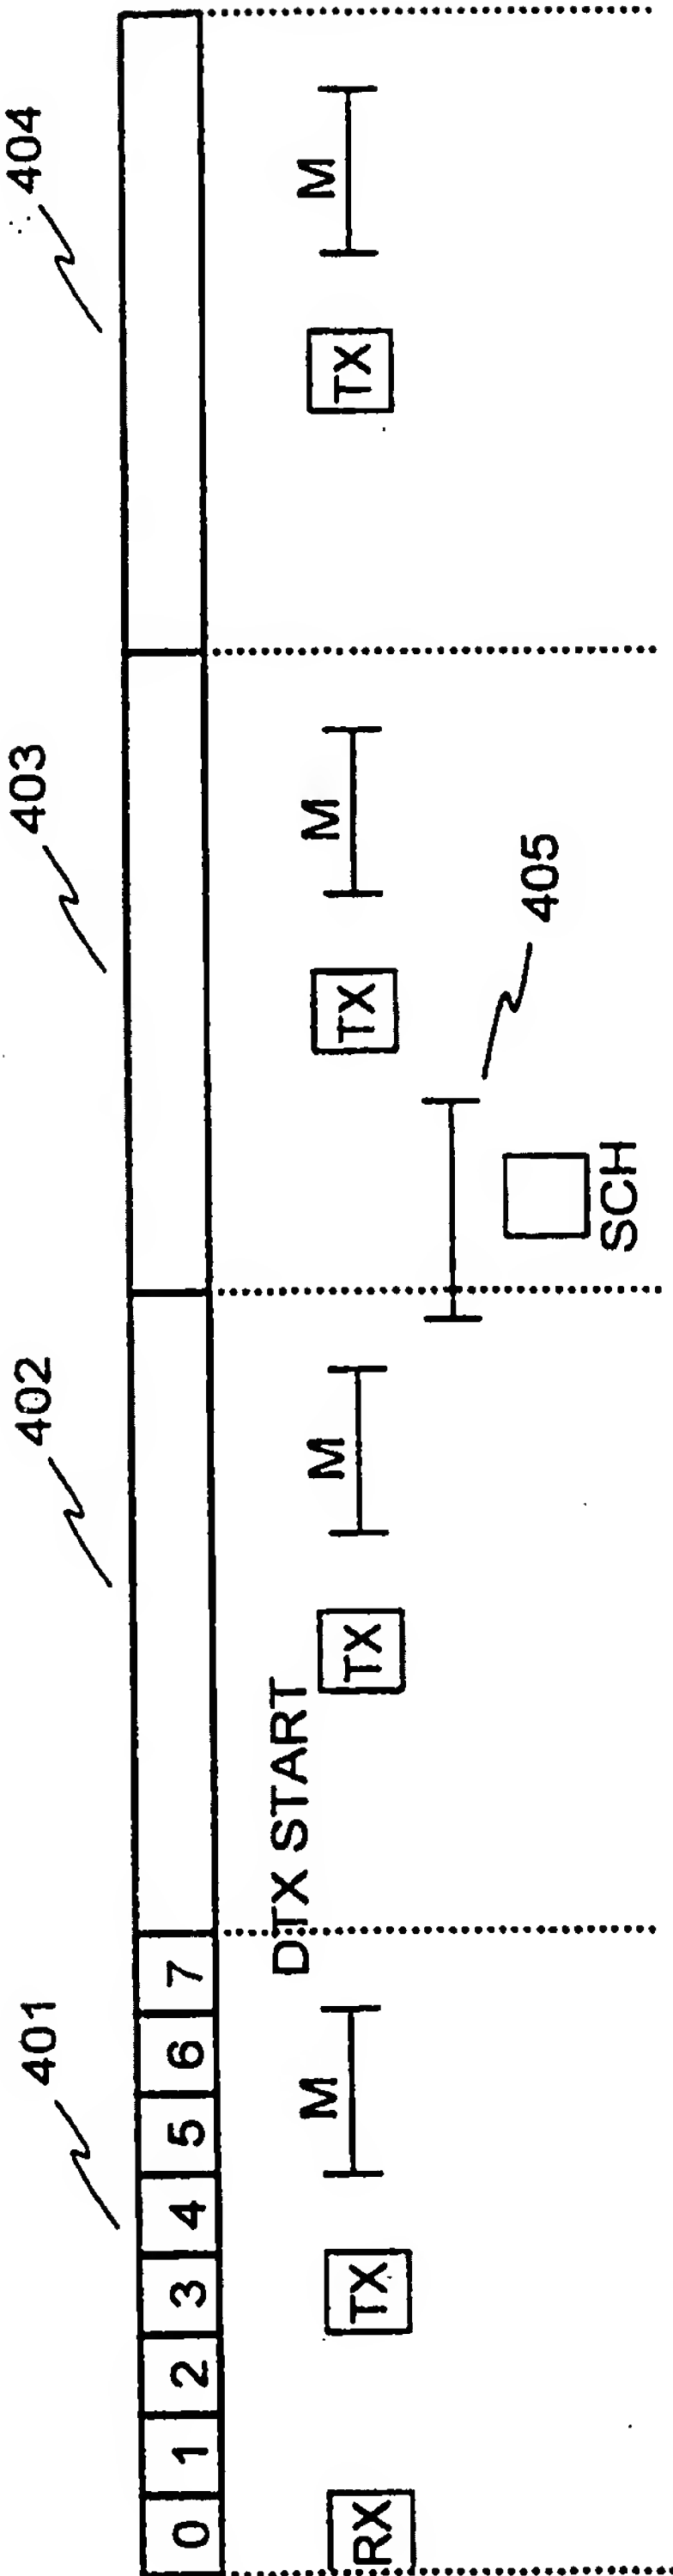
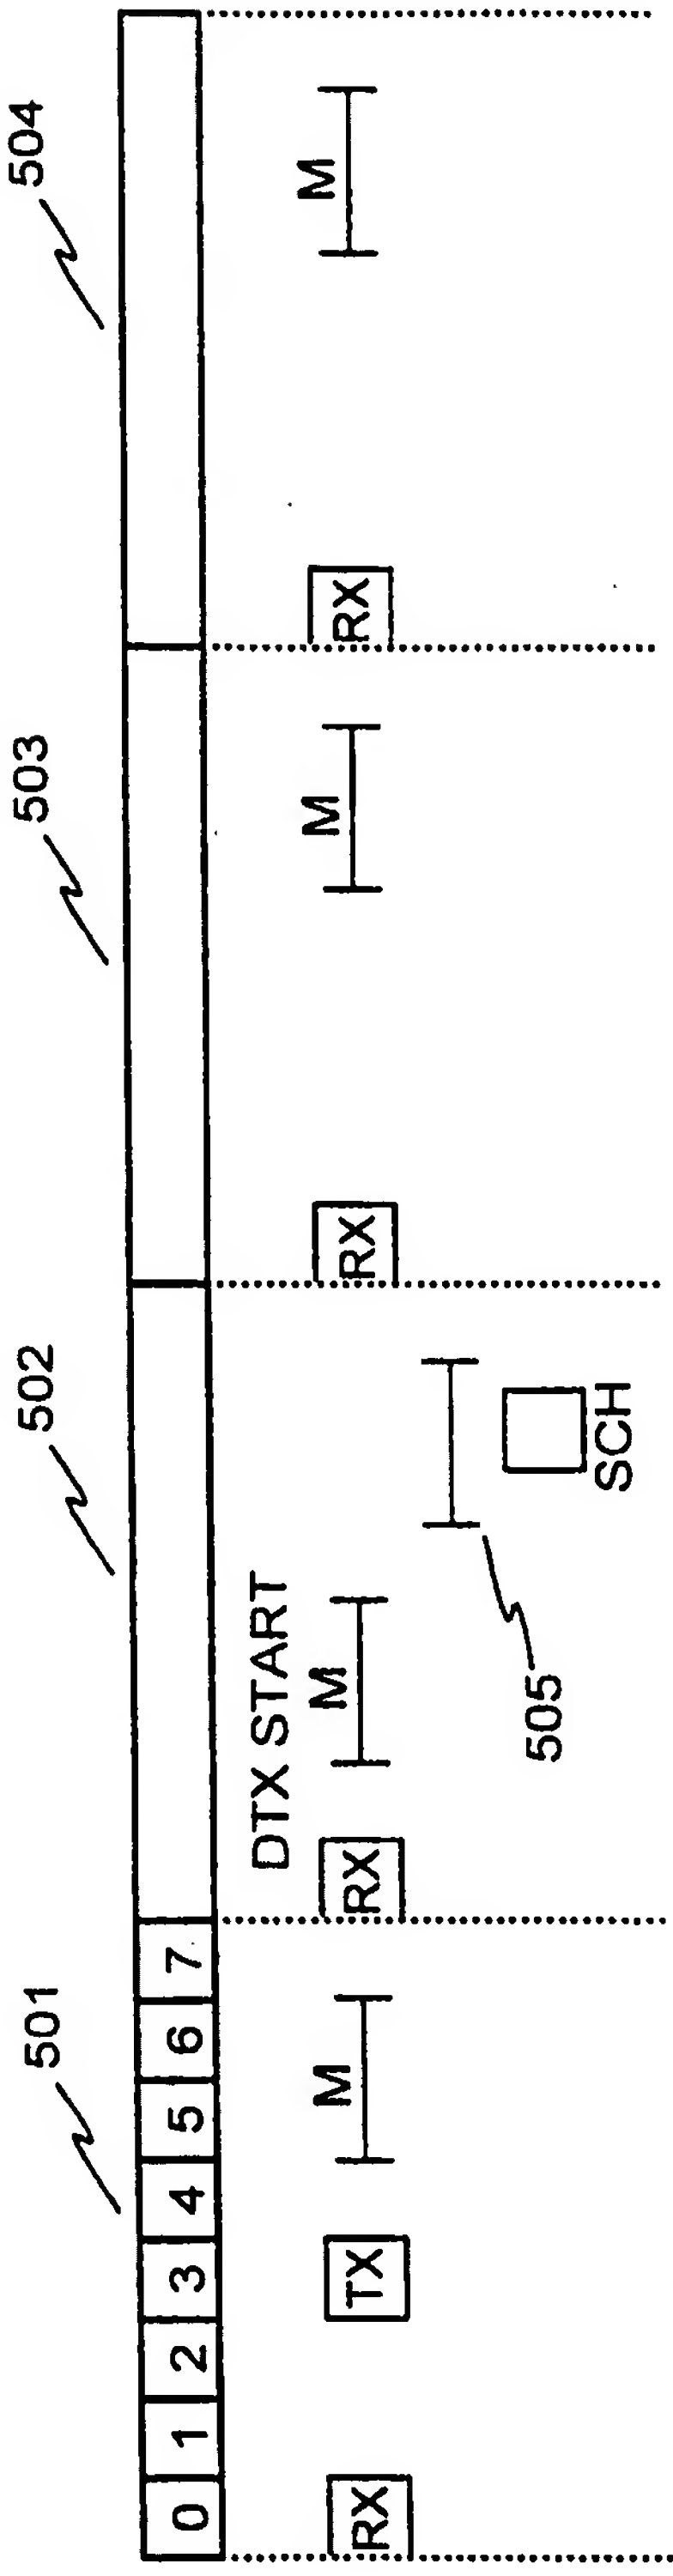


FIGURE 3

DTX IN UP-LINK  
TRANSMISSION



**FIGURE 4**  
DTX IN DOWN-LINK  
TRANSMISSION  
DIRECTION



**FIGURE 5**  
DTX IN DOWN-LINK  
DIRECTION &  
MONITORING  
DISPLACEMENT

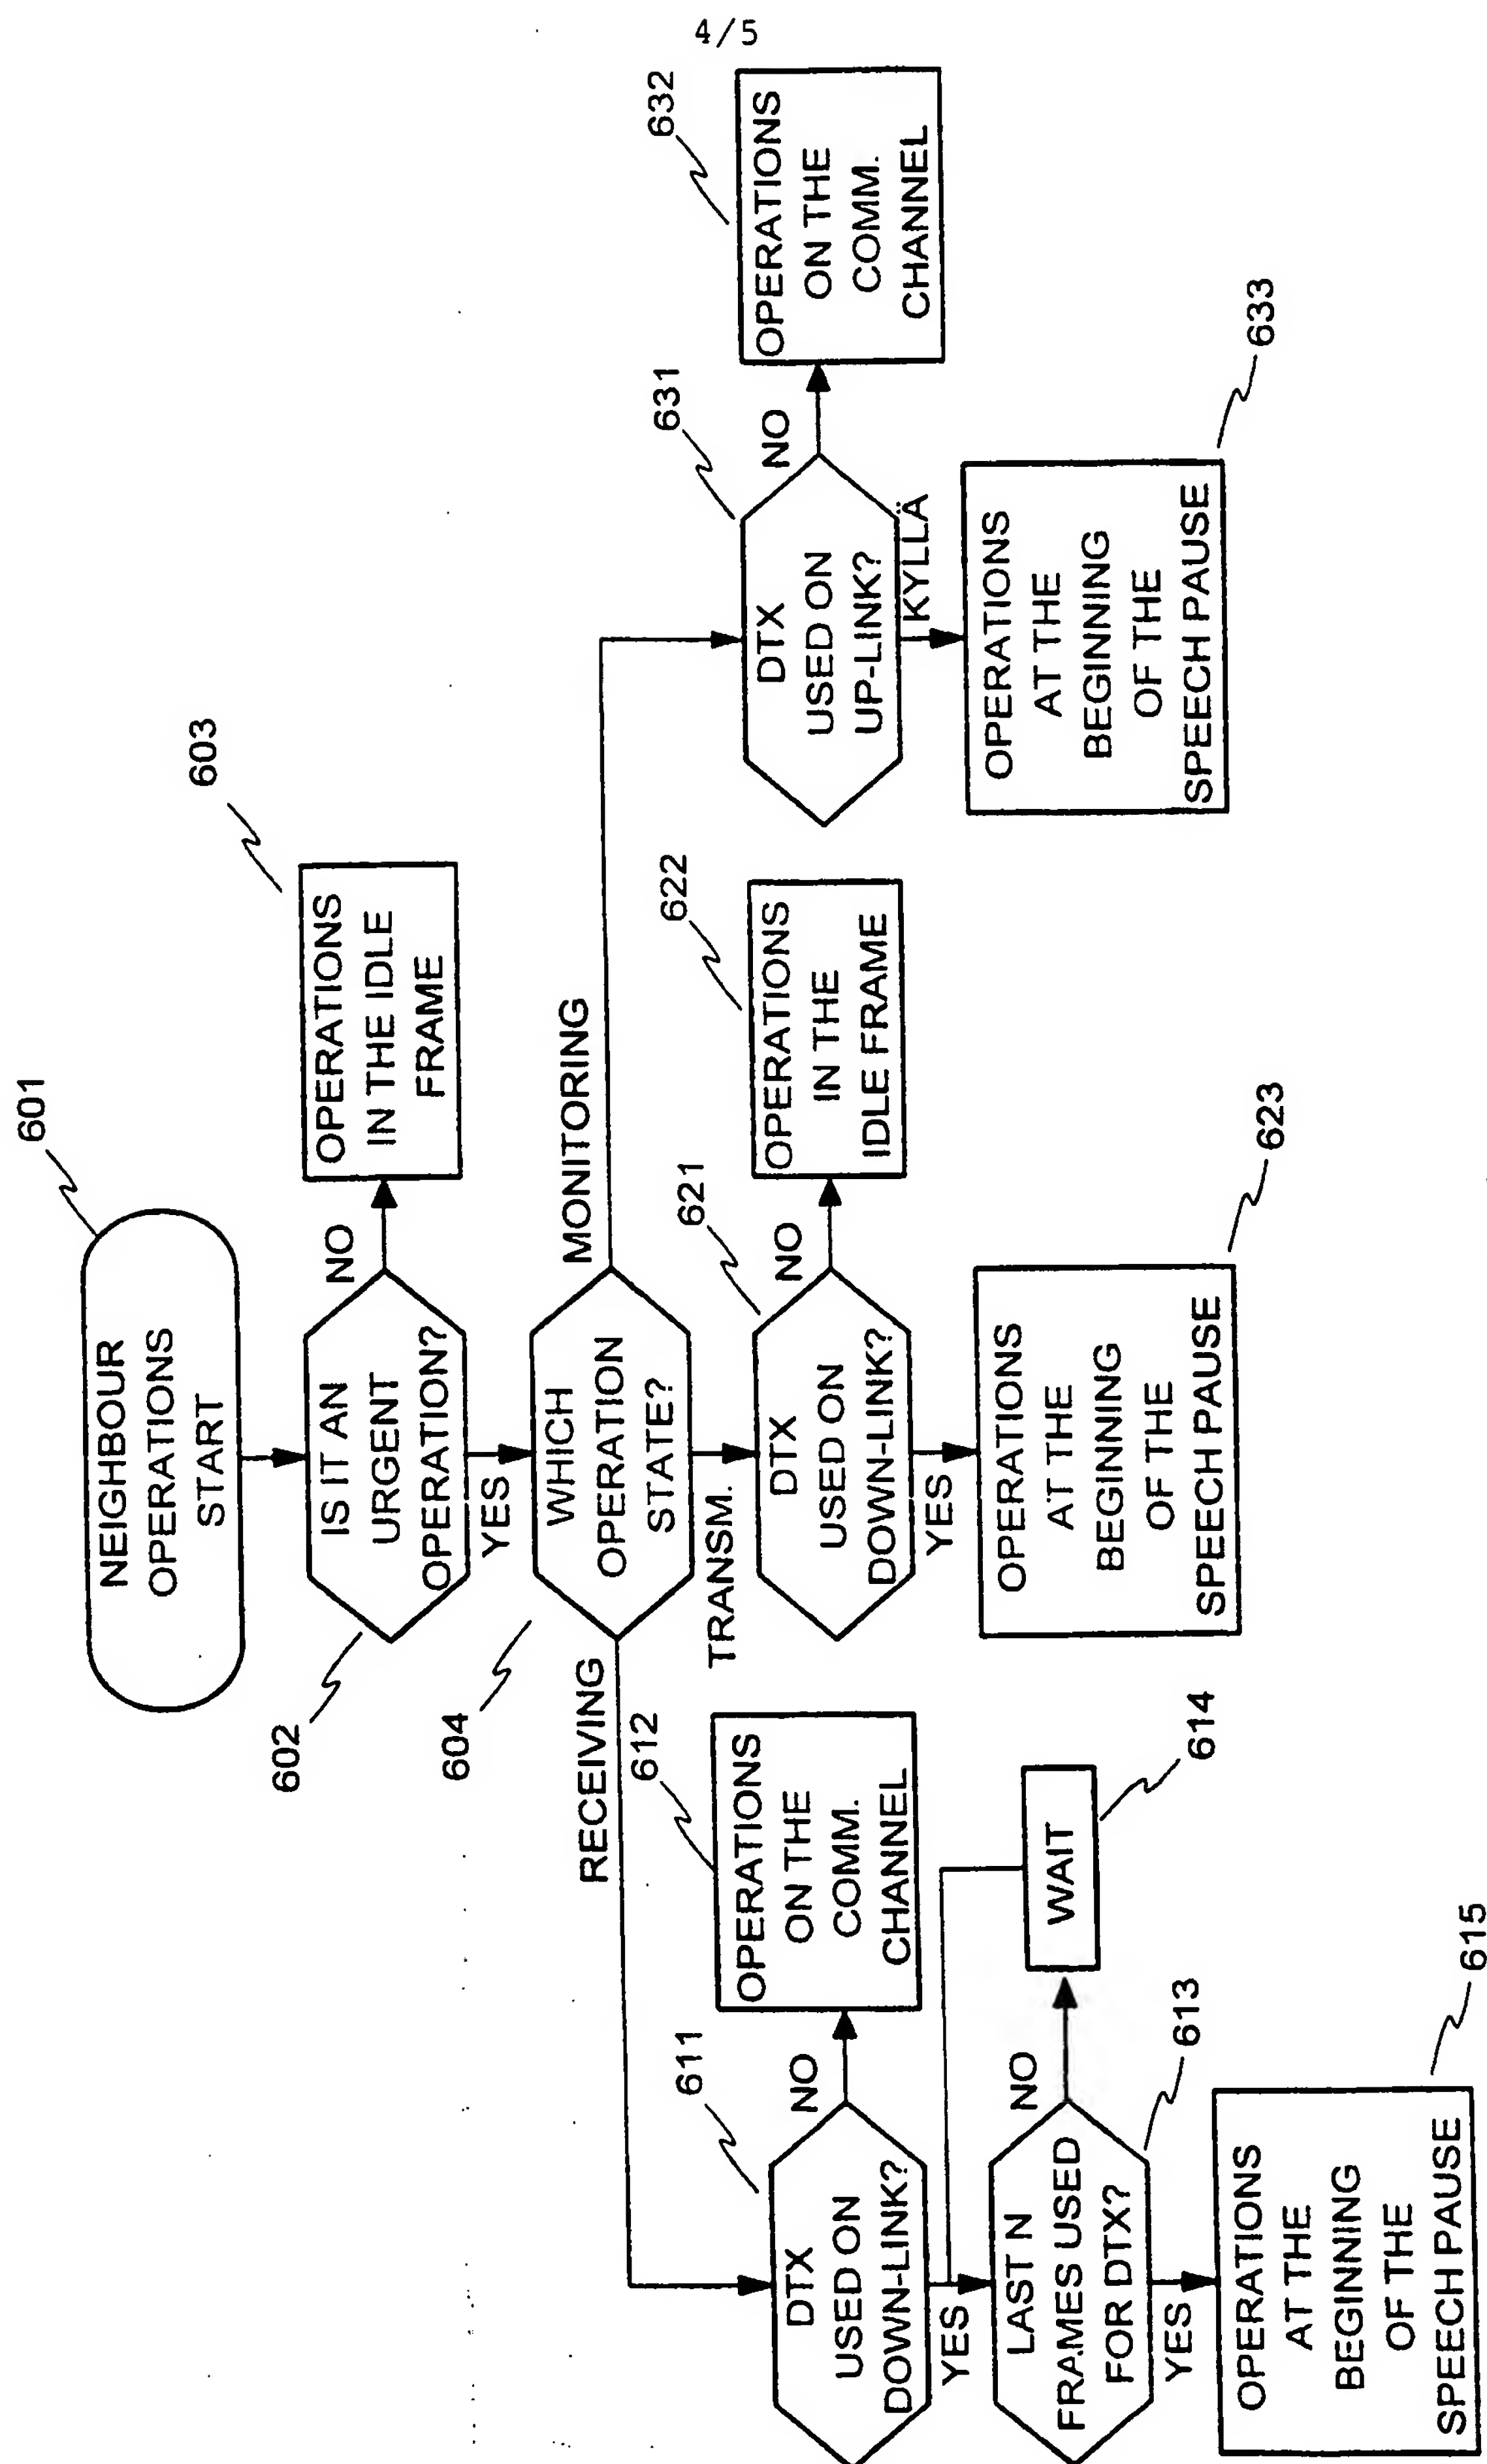


FIGURE 6

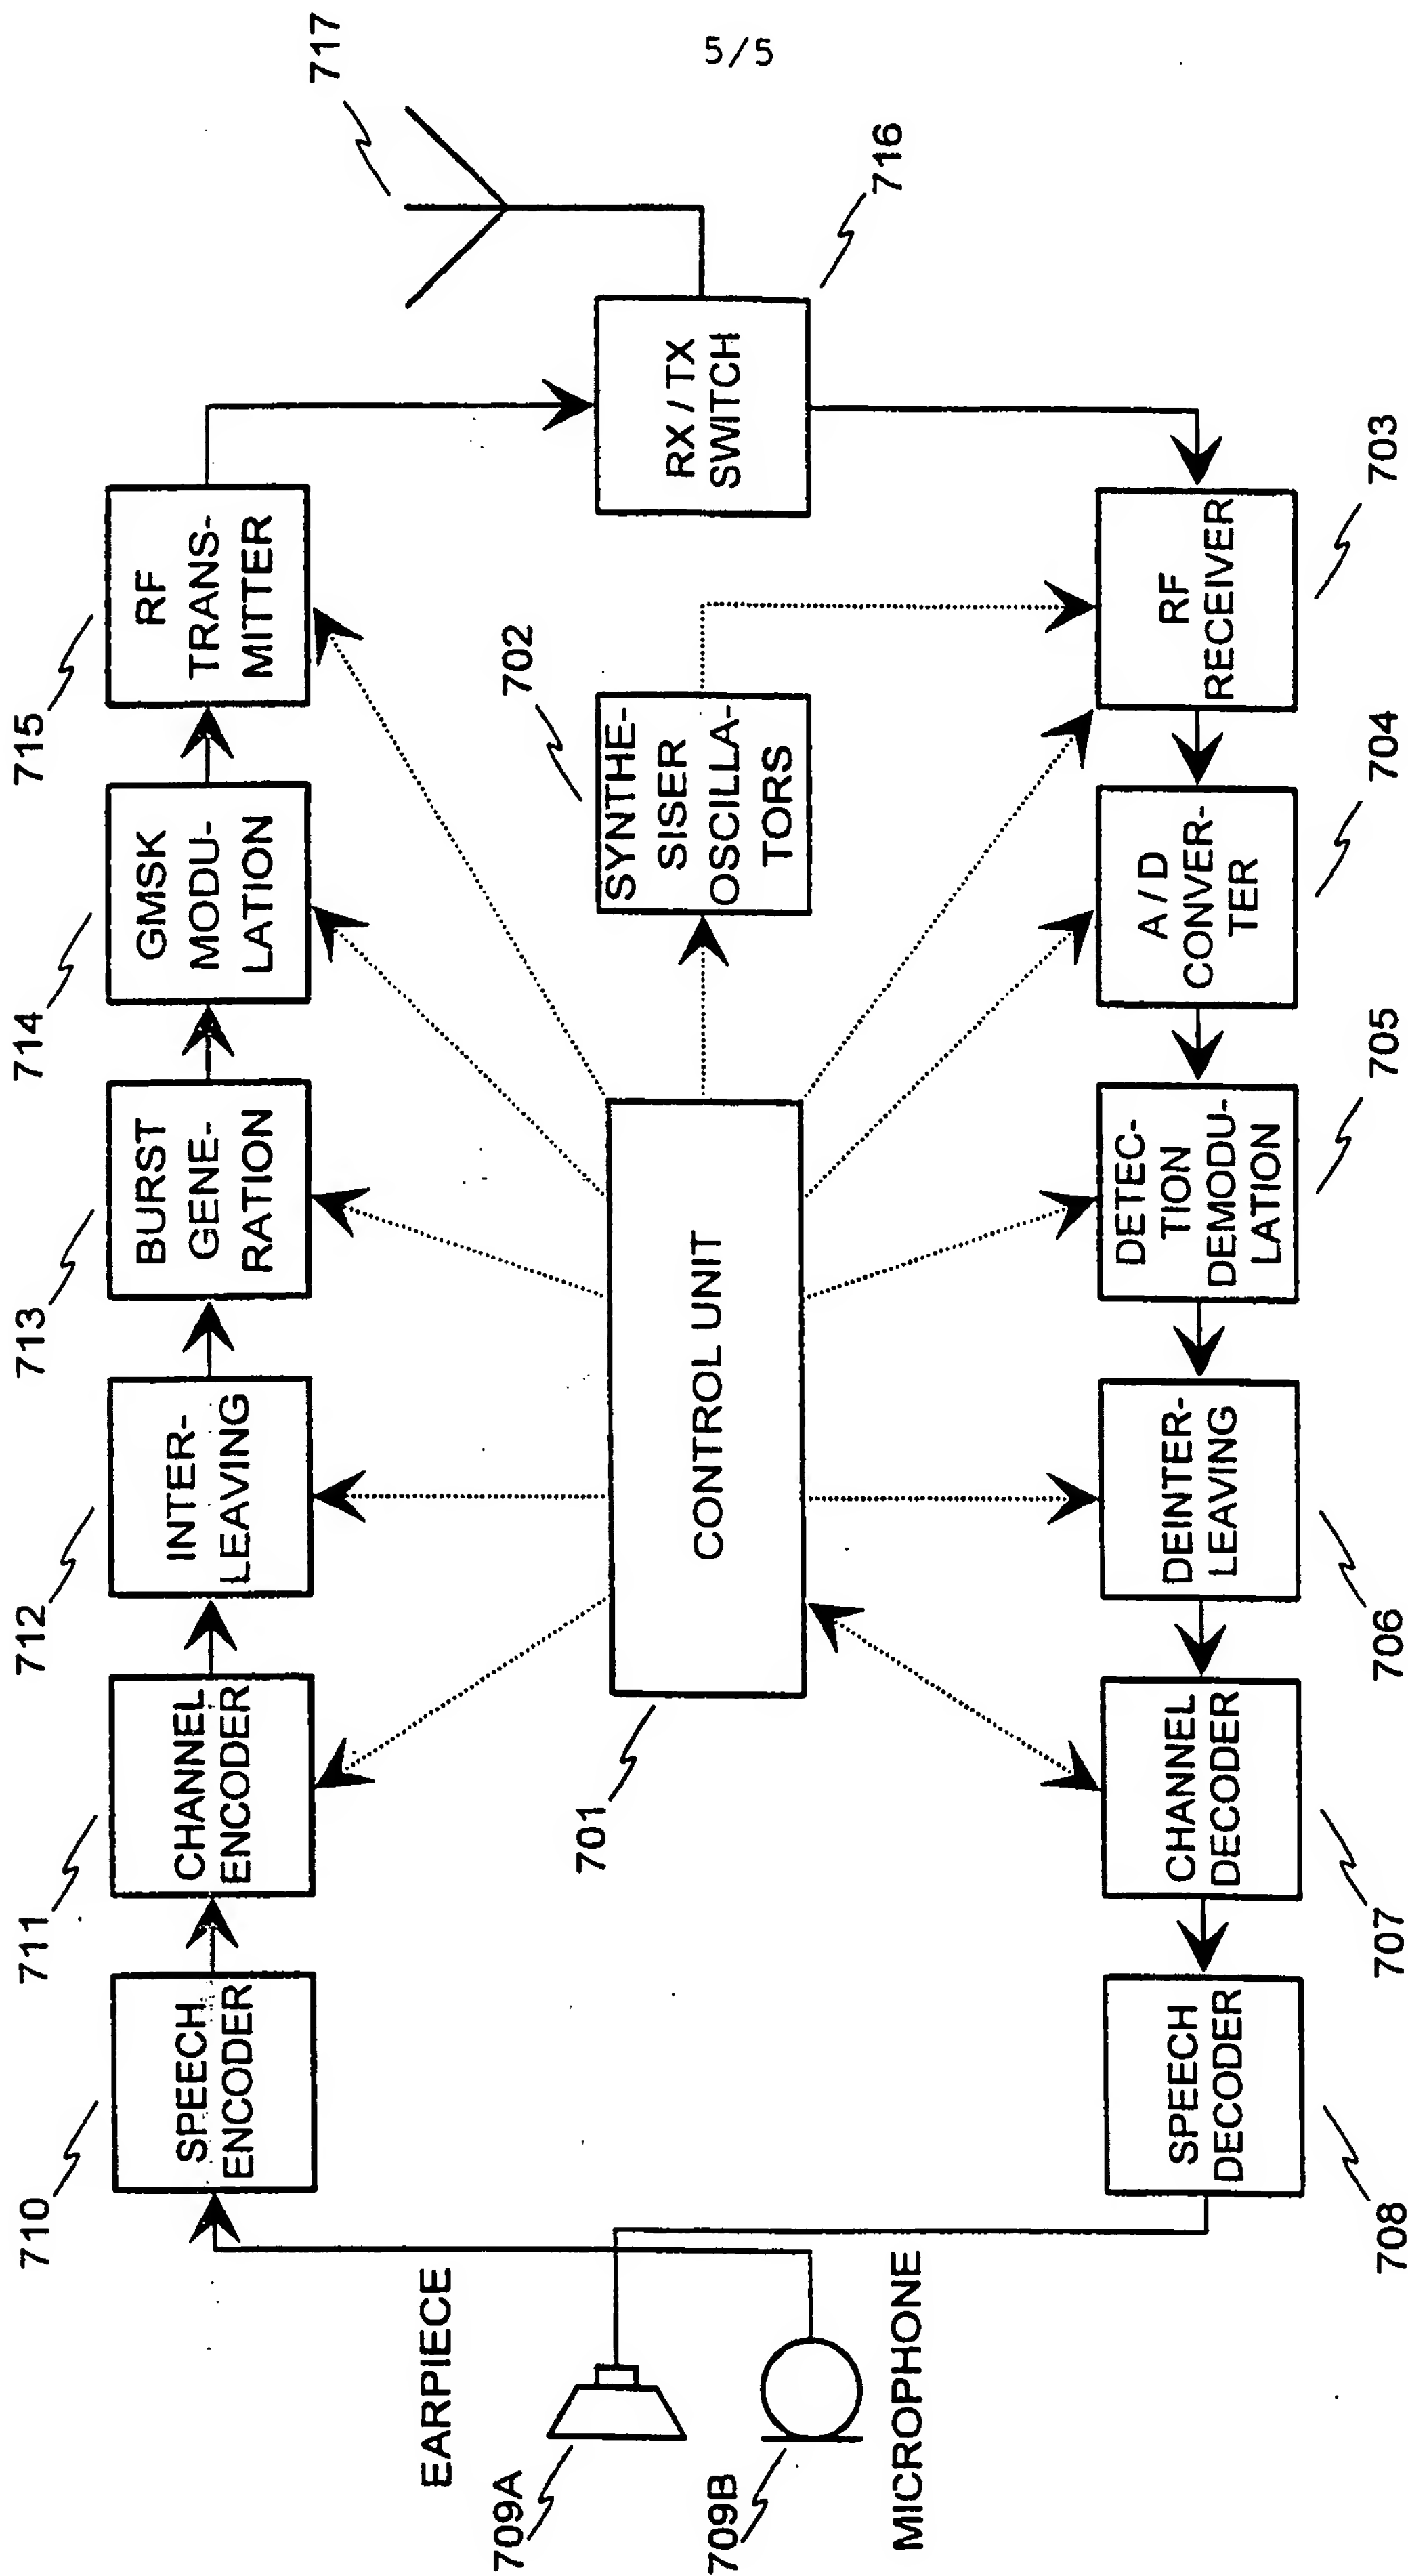


FIGURE 7